

525, 117

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
26 February 2004 (26.02.2004)

PCT

(10) International Publication Number  
**WO 2004/016531 A1**

(51) International Patent Classification<sup>7</sup>: **B65G 43/06**

(21) International Application Number:  
PCT/IB2002/003321

(22) International Filing Date: 19 August 2002 (19.08.2002)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant and

(72) Inventor: BARNARD, Hubert, de Villiers [ZA/ZA]; 103  
van der Merwe Street, Silverton Ridge, 0184 Pretoria (ZA).

(74) Agents: GILSON, David, Grant et al.; Spoor and Fisher,  
PO Box 41312, 2024 Craighall (ZA).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,

CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG,  
SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,  
VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK,  
TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,  
GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: CONVEYOR BELT ARRESTOR

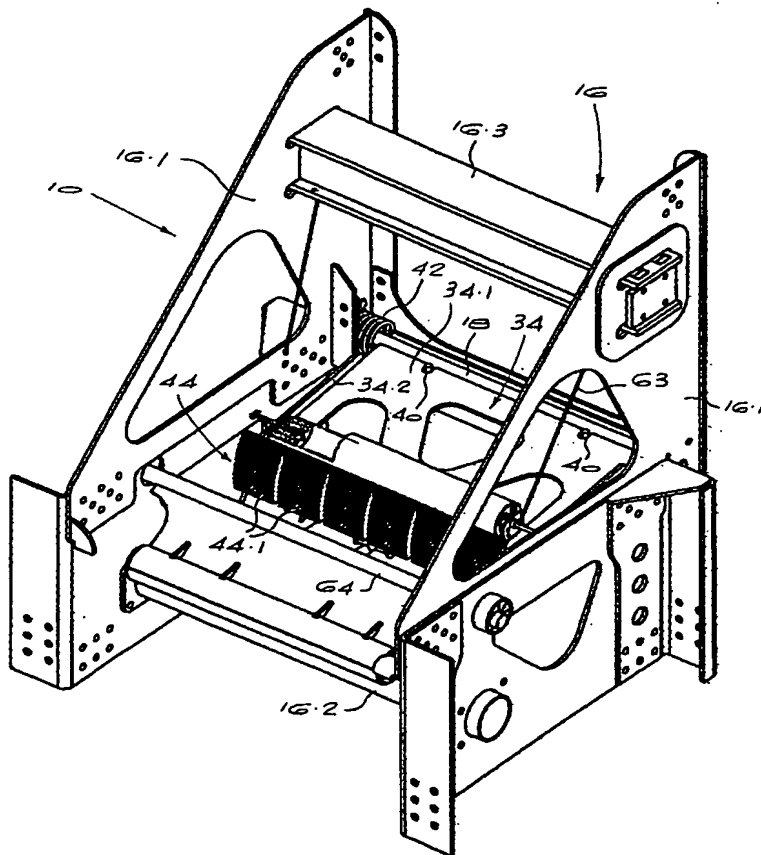

(57) Abstract: The invention concerns a conveyor belt arrestor, primarily for use with inclined conveyor belts, which operates to arrest the belt in the event that the belt breaks. The arrestor (10) of the invention has a frame (16) which is mounted in use to fixed structure of a conveyor belt installation. The frame includes a reaction member in the form of a beam (16.3) located above the top run of the belt (12). A wedging structure (18, 34, 44) is located beneath the top run of the conveyor belt and is mounted for swinging movement in a vertical plane relative to the frame. A torsion spring (42) is tensioned in use to apply a rotational bias to the wedging structure in a direction to swing it upwardly in the event of the belt breaking and belt tension being lost. This lifts the top run (12.1) of the belt towards the reaction member (16.3) such that the top run of the belt is trapped between the wedging structure and the reaction member by a wedging action that prevents movement of the top run of the belt in a direction opposite to its normal direction of forward travel.

WO 2004/016531 A1

## **"CONVEYOR BELT ARRESTOR"**

### **BACKGROUND TO THE INVENTION**

THIS invention relates to a conveyor belt arrestor.

Conveyor belts periodically break, and such breakage usually results in a considerable amount of downtime. In the case of an inclined conveyor belt, breakage normally takes place in the vicinity of the head roller, with the result that the upper and lower runs of the belt tend to slip back under gravity over the idler rollers. The normal slippage of the belt is assisted by the stored tension in the unbroken belt which is released when the belt is broken. The result, if the broken belt is not arrested in some way, is that the broken belt slips back all the way to the lowest point. This is dangerous for nearby personnel and could possibly also cause considerable damage to the lower idlers and other stationery equipment. At the very least belt breakage in this situation results in considerable difficulty in re-establishing the correct position of the belt so that the break can be spliced.

Various devices have been proposed in the past to arrest a broken belt before it can slip back down the slope. For instance, WO01/055013 proposes a device in which, when belt tension is lost as a result of a break in the belt, counterweights swing a clamping member beneath the upper run of the belt upwardly so that the belt is clamped between a stationary cross-member and the clamping member. Somewhat similar arrangements, which also make use of counterweights, are described in SU 1467005 and SU 1219489. Serious disadvantages of such devices include the increased mass and cost attributable to the counterweights and the necessity to enclose the device in a safety cage in order to avoid possible injury to nearby personnel caused by the rapidly swinging counterweights.

SU 179666 describes an arrangement in which the belt is clamped between a fixed cross-member and a clamping member which is driven to a clamping position, on loss of belt tension, by a spring-loaded sprocket. This device is considered to be unduly complicated and accordingly expensive.

### **SUMMARY OF THE INVENTION**

According to the present invention there is provided a conveyor belt arrestor comprising a frame mountable to fixed structure of a conveyor belt installation and including a reaction member located operatively above the top run of a conveyor belt of the installation, a wedging structure located operatively beneath the top run of the conveyor belt and mounted for swinging movement in a vertical plane relative to the frame, a torsion spring arranged to be tensioned in use to apply a rotational bias to the wedging structure in a direction to swing the wedging structure upwardly, whereby in the event of the belt breaking and belt tension being lost, the torsion spring swings the wedging structure upwardly to lift the top run of the belt towards the reaction member such that the top run of the belt is trapped between the wedging structure and the reaction member by a wedging action that prevents movement of the top run of the belt in a direction opposite to its normal direction of forward travel.

Other novel features of the invention are defined in the appended claims.

One advantage of the use of a torsion spring arrangement as opposed to the previously proposed counterweight systems is the fact that the resulting mechanism is considerably more compact and lighter, which in turn means that the frame and other ancillary structures do not need to be as robust or massive. The use of a torsion spring arrangement is also considerably safer than a swinging counterweight system. Another advantage is the wedging action to arrest the belt. This is more secure than the conventional transverse clamping action where the possibility of belt slippage exists.

**BRIEF DESCRIPTION OF THE DRAWINGS**

The invention will now be described in more detail, by way of example only, with reference to the accompanying drawings in which:

- Figure 1** shows a perspective view of a conveyor belt arrestor according to this invention;
- Figure 2** shows a plan view of the conveyor belt arrestor;
- Figure 3** shows a sectional side view of the arrestor during normal belt operation;
- Figure 4** shows a similar view of the arrestor after actuation to arrest the conveyor belt;
- Figure 5** shows a detail of the conveyor belt arrestor of the invention;
- Figure 6** shows the detail of Figure 5 from a different angle;
- Figure 7** shows another detail of the conveyor belt arrestor; and
- Figure 8** shows a cross-sectional detail of one end of the roller carried by the arrestor structure support arm.

**DESCRIPTION OF THE ILLUSTRATED EMBODIMENT**

Figures 1 to 4 illustrate a conveyor belt arrestor 10 according to the invention. For clarity of illustration, the belt 12 itself is not shown in Figures 1 and 2. The upper and lower runs of the belt are indicated by the numerals 12.1 and 12.2 respectively in Figures 3 and 4. The direction of normal belt movement is indicated by the arrow 14. The orientation of the drawings shows the belt moving horizontally, but in the primary application of the

invention the conveyor belt will be inclined relative to the horizontal, with the upper run of the belt moving upwardly at the incline angle.

As indicated previously, belt breakage normally takes place in the vicinity of the head roller (not shown) around which the belt 12 passes. For reasons which will emerge subsequently, the arrestor 10 is installed at a position close to and slightly below, i.e. slightly upstream, of the head roller.

The arrestor 10 includes a frame 16 which is connected to fixed structure (not shown) at the sides of the conveyor belt. The frame includes side plates 16.1 on either side of the belt 12, a tubular frame member 16.2 spanning between the side plates 16.1 beneath the lower run 12.2 of the belt, a reaction member in the form of a beam 16.3 spanning between the side plates some distance above the upper run 12.1 of the belt and a lower beam 16.4 also fixed to and spanning between the side plates 16.1.

As shown in Figure 3 the upper run 12.1 of the belt is supported by troughed idlers 17 on either side of the arrestor.

The arrestor 10 also includes a wedging structure incorporating a rotatable shaft 18 which extends transversely between the side plates 16.1 beneath the upper run of the belt. Mounted fast on the ends of the shaft 18, inside the side plates 16.1, are toothed sprockets 20. On each side a pinion 22 carried by a stub shaft 24 mates with the relevant sprocket 20. The stub shaft 24 projects outwardly through an opening in the adjacent side plate 16.1 and has a hexagonal head 26 as shown in Figure 6. In Figure 6, the side plate 16.1 has been omitted to enable the relevant components to be seen. A toothed detent 28 also engages with the sprocket 20. A threaded shank 30 projects laterally from the detent through a slot 31 in the side plate 16.1 and carries, outside the side plate, a nut 32. With the nut loose, the slot 31 allows the detent 28 to be raised out of engagement with the sprocket or lowered into engagement with the sprocket.

One edge of an arm 34, forming part of the wedging structure which is connected to the shaft 18. The arm includes a plate 34.1 and flat, vertically oriented bars 34.2 which are connected to and reinforce the opposite side edges of that plate.

The shaft 18 is located rotatably between a bar 38 which is connected on edge to the plate 16.4 and a pair of pins 40 which project upwardly from that plate. The bar 38 and pins 40 restrain the shaft 18 from moving backwards or forwards but allow the shaft to rotate freely. Referring for instance to Figure 6 it will be seen that the plate 34.1 of the arm 34 is formed with cut-outs 41 in which the pins 40 can locate when the arm 34 is at the figure 3 orientation.

A coiled torsion spring 42 is located about each end of the shaft 18, inwardly of the sprocket 20. One end of the spring 42 is engaged with the lower beam 16.4 and the other end is located behind the plate 34.1, as seen in Figure 7.

The opposite edge of the arm 34 carries an arrestor structure 44, also forming part of the wedging structure and composed of a series of wedge segments 44.1. Pivoted to a lug 46 on the structure 44 is a detent arm 48. Supported rotatably between lugs 50 on the arm 34, at a position adjacent the structure 44, is a roller 52 one end of which is seen in cross-section in Figure 8. The roller 52 includes a tubular roller body 54 supported by roller bearings 56 on a tubular shaft 58 supported by the lugs 50. A sub-shaft 60 extends rotatably through the shaft 58 and is supported at its inner end relative to the roller by a unidirectional bearing 62. A cord 63 has one end attached to the sub-shaft 60 and its other end attached to the beam 16.3.

Each end of a transverse shaft 64 is supported in an eccentric opening in an element 66 mounted in the associated side plate 16.1, as shown in Figures 1, 3 and 4. The element 66 is rotatable relative to the side plate 16.1 but can be clamped relative to the side plate at any desired rotational position. One edge of an arm 68 in the form of a flat plate extends rigidly

from the shaft 64 and carries, at its remote edge, a tubular bar 70. A lug 72 projects radially from the bar 70 as illustrated.

Figure 3 shows the arrestor 10 of the invention during normal belt travel in the direction 14. After the belt has been installed, the torsion springs 42 are tensioned to a predetermined degree. In each case this is achieved, with the detent 28 raised away from the sprocket 20, by applying a torque spanner or the like to the hexagonal head 26 to rotate the head, stub shaft 24, pinion 22 and, accordingly, the sprocket 20. The torsion applied to the spring is in such a direction that the spring tends to urge the arm in a counterclockwise direction when viewed in Figure 3, i.e. the spring is tensioned in a clockwise direction when viewed in that Figure. The same procedure is carried out on both sides of the arrestor 10, so that both springs store the same tension.

The underside of the top run 12.1 of the belt locates against the roller 52. The weight of the belt and, in use, the material which it carries, applies a downward force to the roller 52 and, accordingly, to the arm 34. This downward force, combined with effect of the tensioned belt, is sufficient to maintain the components in their Figure 3 positions. I.e. to maintain the tension stored in the springs 42.

Referring to Figure 3 it will be noted that in the normal operating position, the end of the detent arm 48 remote from the arrestor structure 44 is lodged between the lug 72 and the point at which the arm 68 is connected to the bar 70. In this position, the detent arm 48 holds the arm 68 and bar 70 in the positions seen in Figure 3.

If the belt should break at a position close to the head roller, i.e. at a position to the right hand side of the arrestor 10 as viewed in Figures 3 and 4, there will be an immediate loss of tension in the upper run of the belt and, at the same time, a tendency for the belt to slip down the slope, i.e. to the left in a direction 80 opposite to the arrow 14.

As soon as the belt loses tension, the tension stored in the springs 42 is sufficient to overcome the weight of the belt and any material remaining thereon. The springs cause the shaft 18 to rotate in a counterclockwise direction as viewed in Figure 3, and this in turn causes the arm 34 to swing up rapidly in the direction of the arrow 82, lifting the top run 12.1 of the belt as it does so. The arrestor structure 44, i.e. the wedge segments 44.1, come into direct contact with the underside of the top run 12.1 and lift the belt off the roller 52. With further movement of the arm 34, the arrestor structure brings the upper surface of the top run 12.1 of the belt into contact with the underside of the beam 16.3. The top run of the belt is accordingly trapped between the wedge segments and the beam and is prevented from slipping any further than it already has.

The wedge surfaces 44.2 of the wedge segments 44.1 and the arc through which those surfaces move in relation to the beam 16.3 as the arm swings ensures that a wedging action is applied to the top run of the belt, to ensure that it is securely trapped. From Figure 4 it will be understood that any tendency of the belt to slip further in the direction 80 will merely result in more powerful wedging action to prevent such movement. This wedging action applied by the arrestor 10 when actuated is considered to be an important advantage of the invention when compared to prior arresting devices, such as that described in WO 01/055013, which merely apply a clamping action in a direction transverse to the belt.

It will also be understood that a competent wedging action can be achieved with a variety of different belt thicknesses.

As soon as the arm 34 commences its upward swinging movement, the end of the detent arm 48 dislodges from its Figure 3 position and the detent arm is free to swing downwardly. At the same time, the arm 68 and bar 70 swing downwardly under gravity towards the tubular frame member 16.2. As shown in Figure 4, the bottom run 12.2 of the belt 12 is trapped between the bar 70 and the tubular frame member 16.2, and any tendency for this run to slip downwardly in the direction 80 is accordingly also resisted.



Given that the belt thickness may vary from installation to installation, facility is provided for adjusting the effective length of the arm 68 to ensure that the bottom run of the belt is properly trapped. As indicated above, the arm 68 is carried by the shaft 64 the ends of which locate rotatably in eccentric openings in the elements 66. By rotating the elements 66 relative to the side plates 16.1, the shaft 64 can be moved towards or away from the tubular frame member 16.2. The desired rotational position of the elements 66 for the belt thickness in question is set by clamping these elements relative to the side plates 16.1, thereby also setting the effective length of the arm 68 and the quality of the trapping action applied to the bottom run of the belt.

In another version of the invention, not illustrated, it is possible to replace the bar 70 with a wedging member having an action similar to that of the arrestor structure 44, i.e. so as to generate a wedging action to arrest the bottom run of the belt.

Throughout the time that the top run of the belt is running normally in the direction of the arrow 14, the roller 52 rotates freely because of the contact of the belt on the roller. The arrangement of the bearings 56 and 62 allows the sub-shaft 60 to rotate freely relative to the roller 52 so there is no tendency for the cord 63 to wind up on the sub-shaft. When the belt breaks and the top run 12.1 of the belt 12 starts to slip back, the roller 52 is rotated in the reverse direction. This causes the unidirectional bearing 62 to lock up. The sub-shaft 60 now rotates in unison with the roller. The cord 63 accordingly winds up on the sub-shaft. As the cord winds up its effective length decreases. The resulting tension in the cord pulls the arm 34 upwardly, thereby assisting the springs 42 to raise the arm and arrestor structure 44. The end result is shown in Figure 4, where it will be understood that the cord has been almost fully wound up onto the sub-shaft 60.

The mechanism just described provides an effective back-up to the torsion springs, ensuring that the belt is properly arrested by the described wedging action even if the springs should for any reason fail.

**CLAIMS**

1.

A conveyor belt arrestor comprising a frame mountable to fixed structure of a conveyor belt installation and including a reaction member located operatively above the top run of a conveyor belt of the installation, a wedging structure located operatively beneath the top run of the conveyor belt and mounted for swinging movement in a vertical plane relative to the frame, a torsion spring arranged to be tensioned in use to apply a rotational bias to the wedging structure in a direction to swing the wedging structure upwardly, whereby in the event of the belt breaking and belt tension being lost, the torsion spring swings the wedging structure upwardly to lift the top run of the belt towards the reaction member such that the top run of the belt is trapped between the wedging structure and the reaction member by a wedging action that prevents movement of the top run of the belt in a direction opposite to its normal direction of forward travel.

2.

A conveyor belt arrestor according to claim 1 wherein the wedging structure includes an arm carried by a shaft rotatable relative to the frame and acted upon by the torsion spring.

3.

A conveyor belt arrestor according to claim 2 comprising torsion springs acting on opposite ends of the shaft.

4.

A conveyor belt arrestor according to any one of the preceding claims wherein the wedging structure comprises a plurality of wedge-shaped segments.

5.

A conveyor belt arrestor according to any one of the preceding claims wherein the reaction member is a beam extending transversely over the belt between side structures of the frame.

6.

A conveyor belt arrestor according to any one of the preceding claims and comprising trapping means for trapping the bottom run of the conveyor belt in the event of belt breakage.

7.

A conveyor belt arrestor according to claim 6 wherein the trapping means comprises a fixed frame member located operatively beneath the bottom run of the belt, a trapping member located operatively above the bottom run of the belt and arranged to swing relative to the frame between an inoperative position clear of the bottom run of the belt and an operative position in which it traps the bottom run of the belt against the fixed frame member, and detent means arranged to hold the trapping member in the inoperative position during normal belt operation and, in response to upward swinging movement of the wedging structure, to release the trapping member to swing downwardly under gravity to the operative position.

8.

A conveyor belt arrestor according to claim 7 wherein the trapping member is carried by an arm on a rotatable shaft, the effective distance between this shaft and the fixed frame member being adjustable to cater for different thicknesses of conveyor belt.

9.

A conveyor belt arrestor according to claim 8 wherein the rotatable shaft to which the arm carrying the trapping member is connected has ends which are rotatable in eccentric openings in members which are themselves rotatable relative to the frame to adjust the effective length of the arm.

10.

A conveyor belt arrestor according to any one of claims 8 to 10 wherein the detent means comprises a detent arm one end of which is pivoted to the wedging structure and the other end of which is engagable with the trapping member to hold the trapping member in its inoperative position during normal belt operation and which is arranged to disengage the trapping member when the wedging structure swings upwardly.

11.

A conveyor belt arrestor according to any one of the preceding claims and comprising auxiliary means, acting in addition to the torsion spring or springs, to swing the wedging structure upwardly in the event of belt breakage and loss of belt tension.

12.

A conveyor belt arrestor according to claim 10 wherein the auxiliary means comprises a roller supported rotatably by the frame and arranged to be rotated by the top run of the belt, a sub-shaft on the axis of the roller which can rotate relative to the roller during normal belt operation but which is locked relative to the roller in the event of reverse movement of the belt and corresponding reverse rotation of the roller, and a cord or the like, attached to the sub-shaft and to a point on the frame above the top run of the belt, which is arranged to be wound up on the sub-shaft and thereby to raise the roller and with it the top run of the belt in the event of reverse rotation of the roller.

13.

A conveyor belt arrestor according to claim 11 and comprising a unidirectional bearing supporting the sub-shaft relative to the roller.

1/8




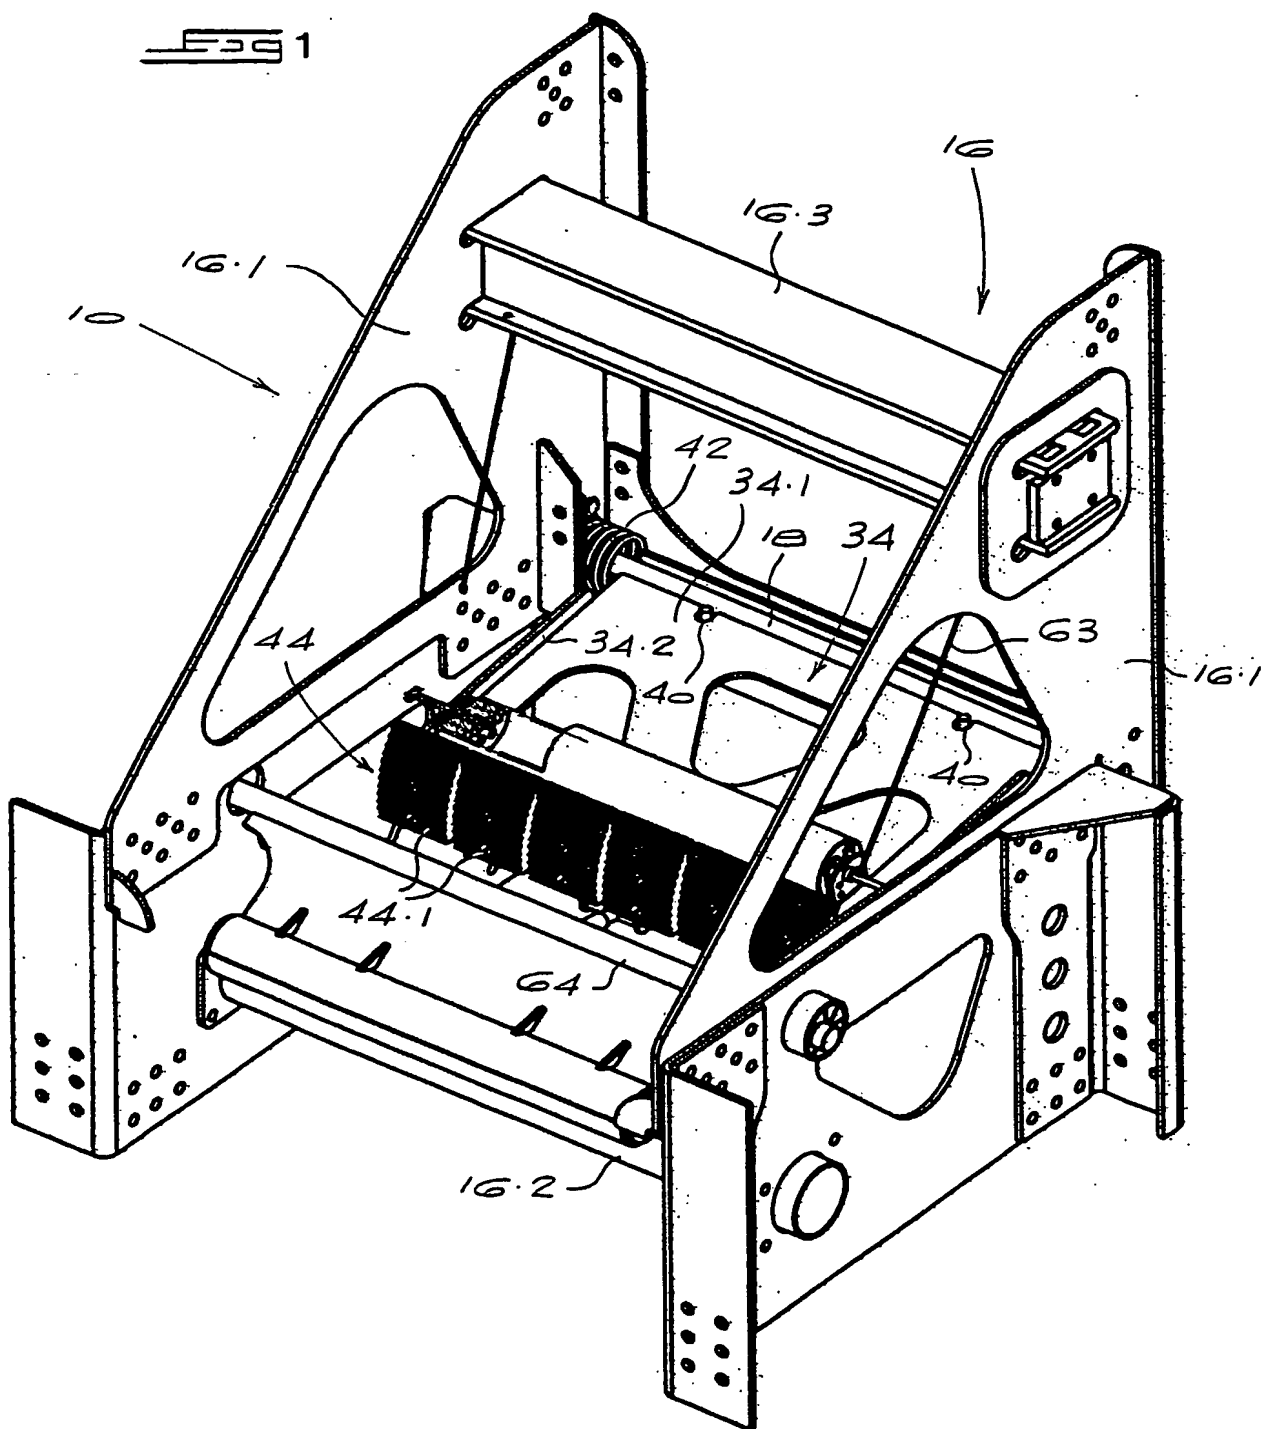


FIG 2




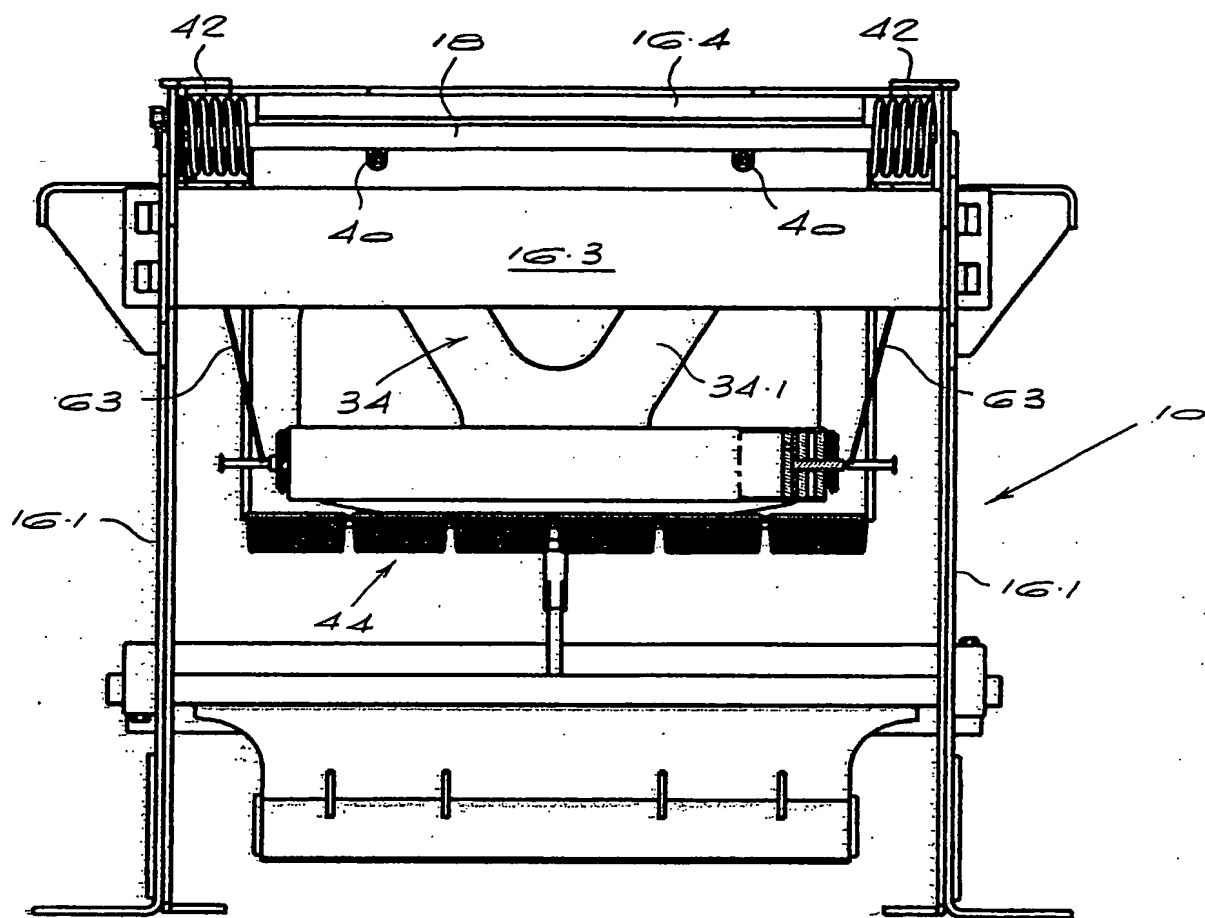

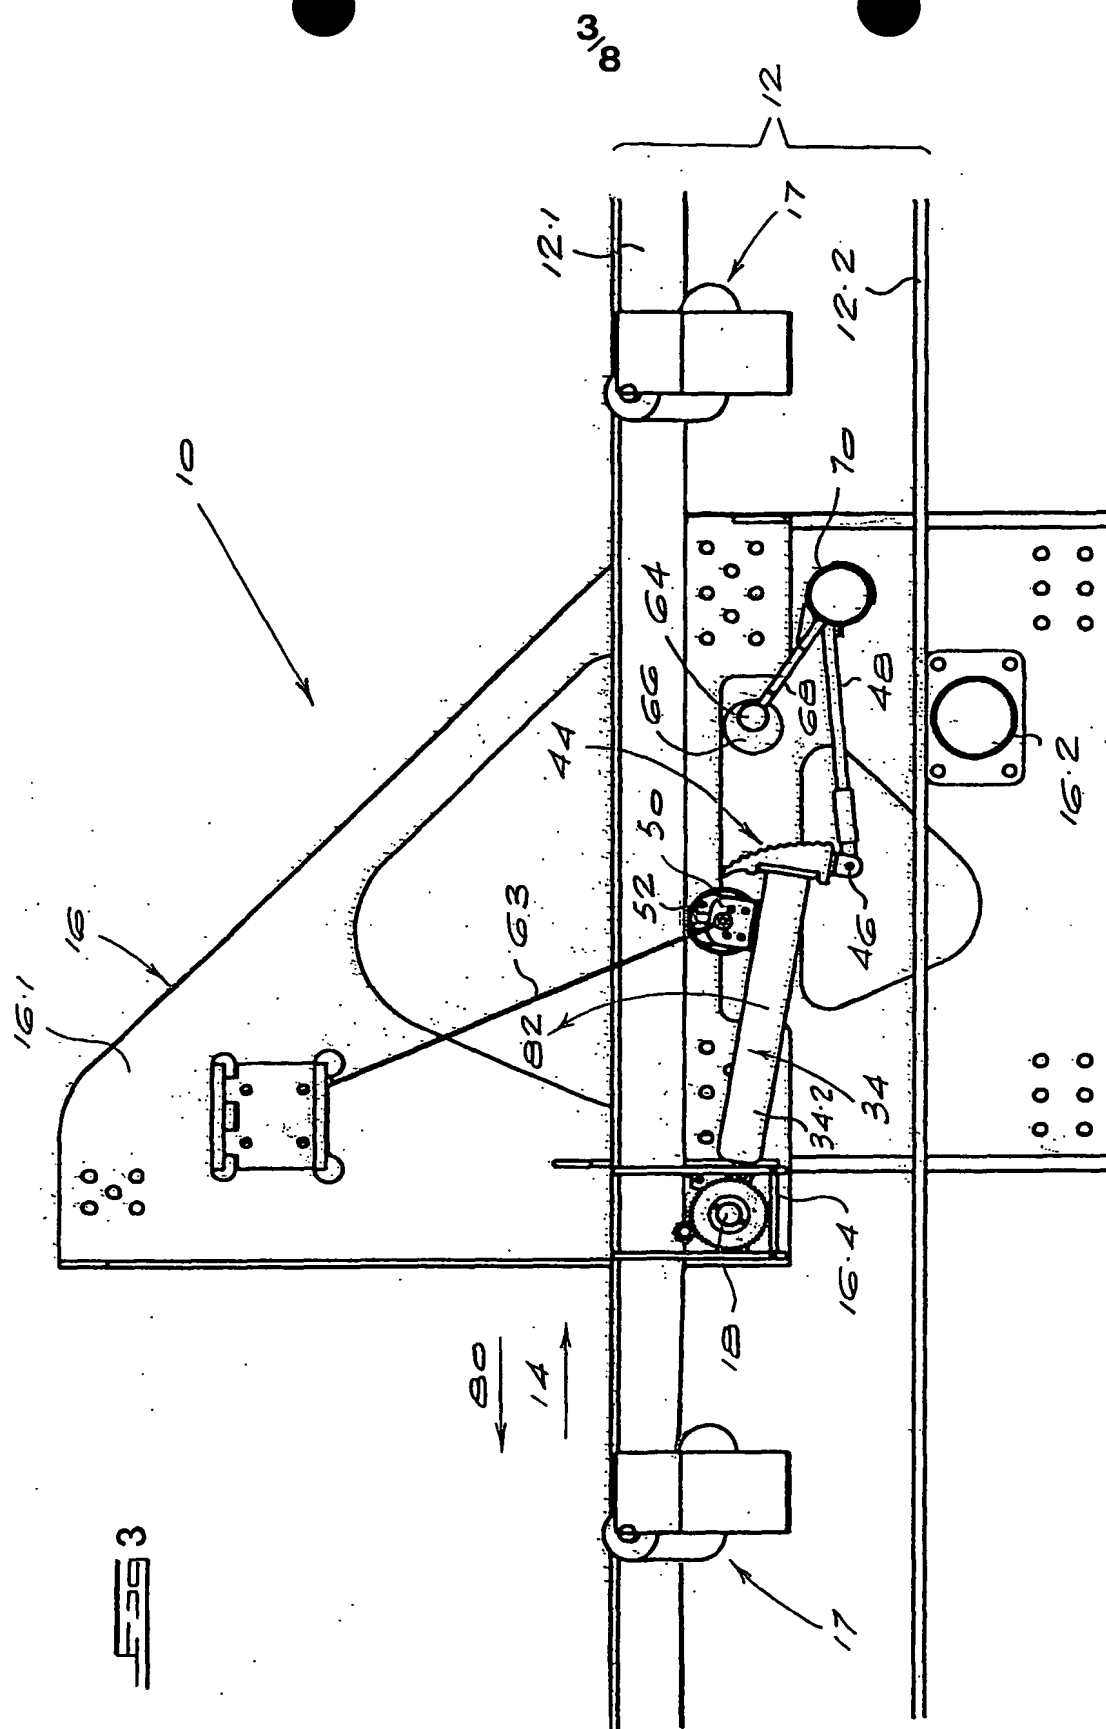

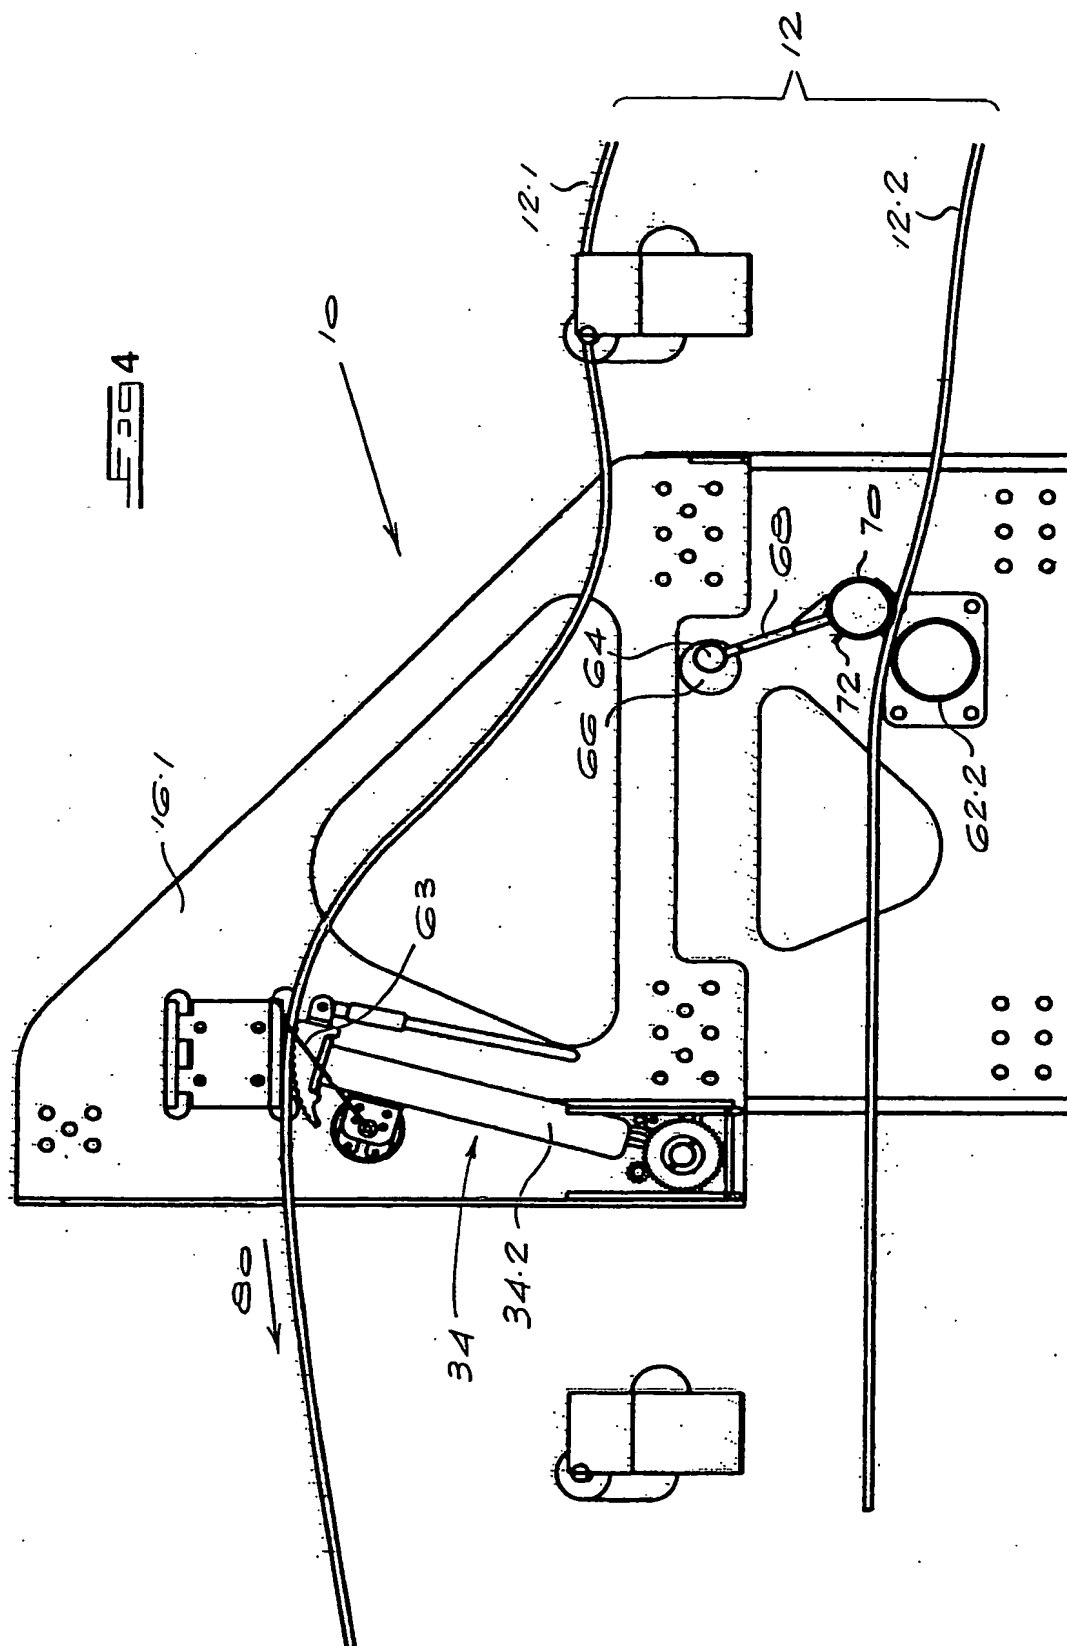

5

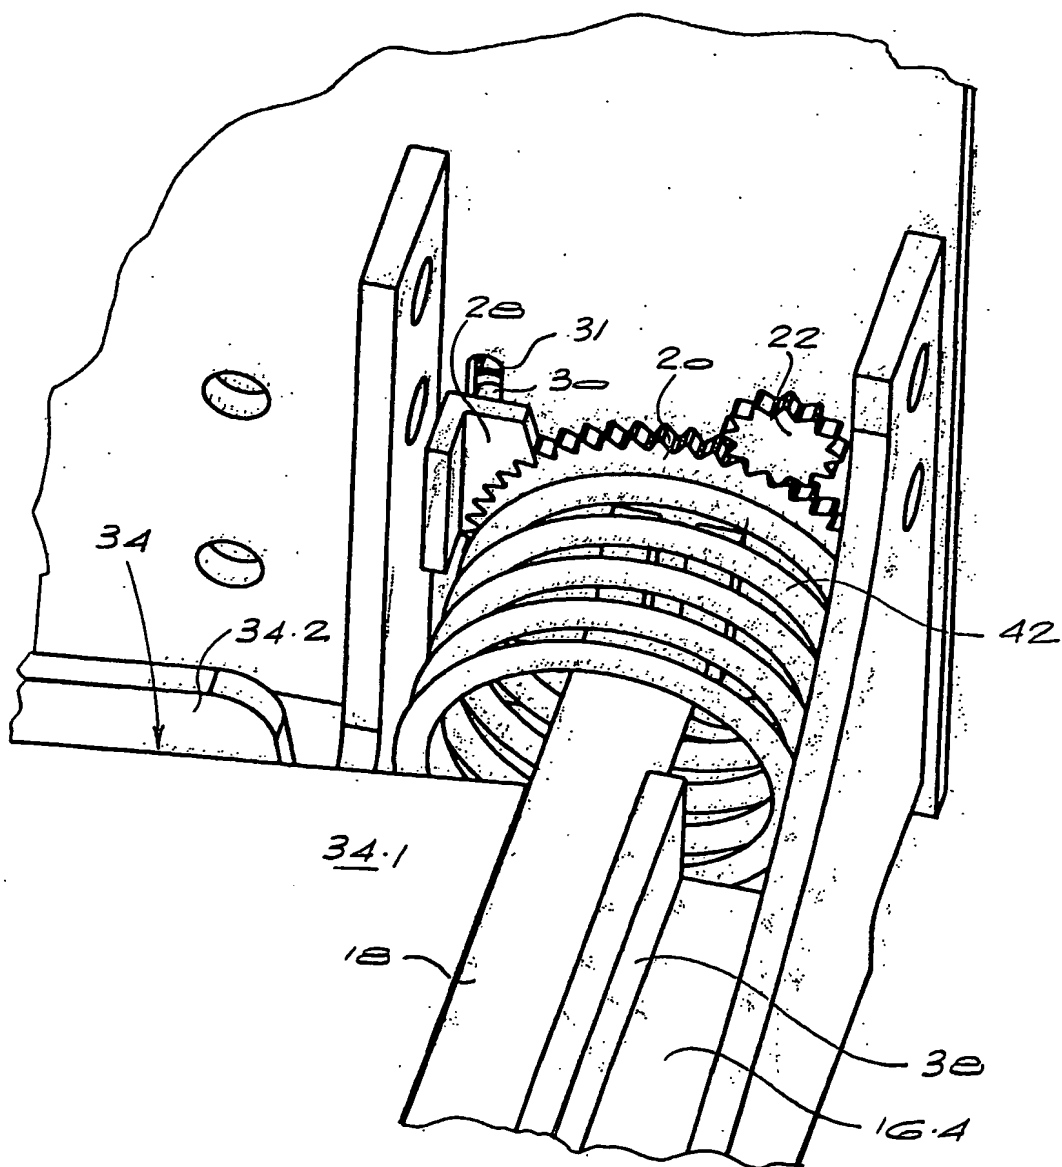



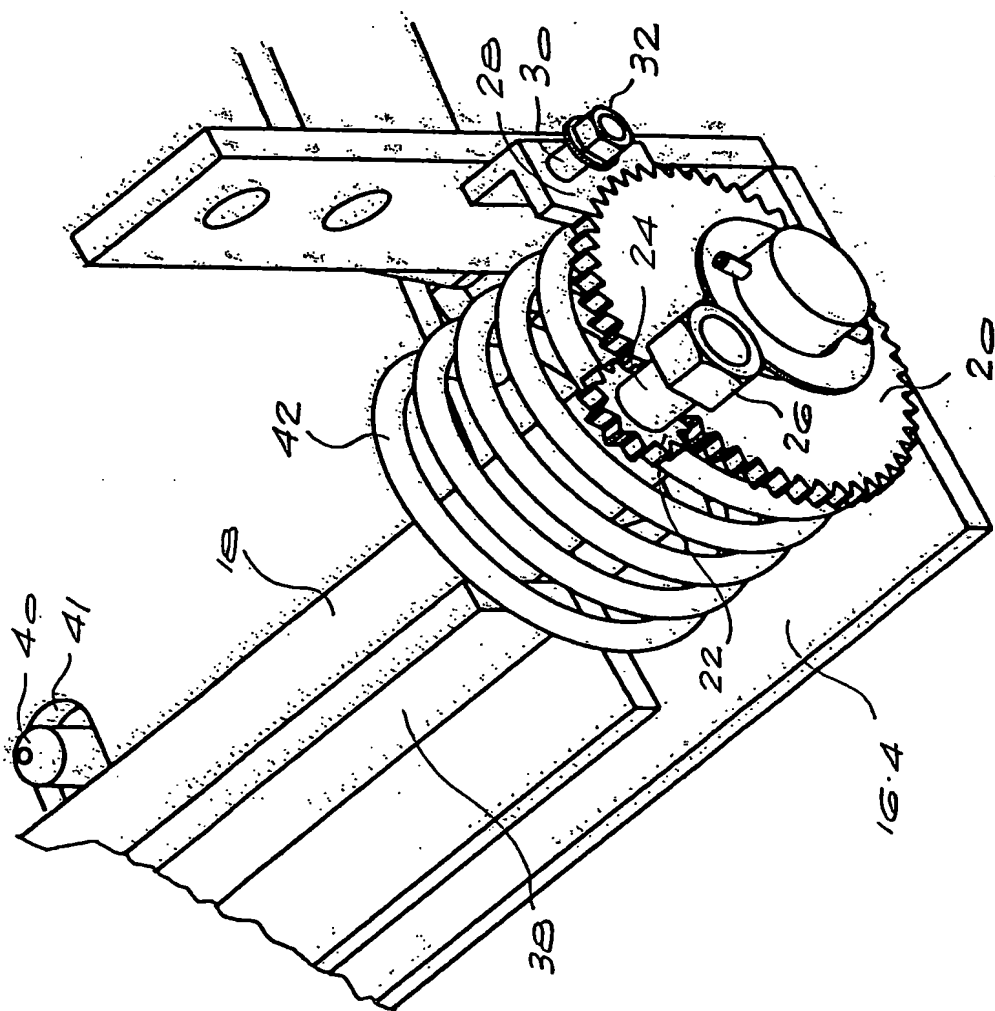


FIG 7

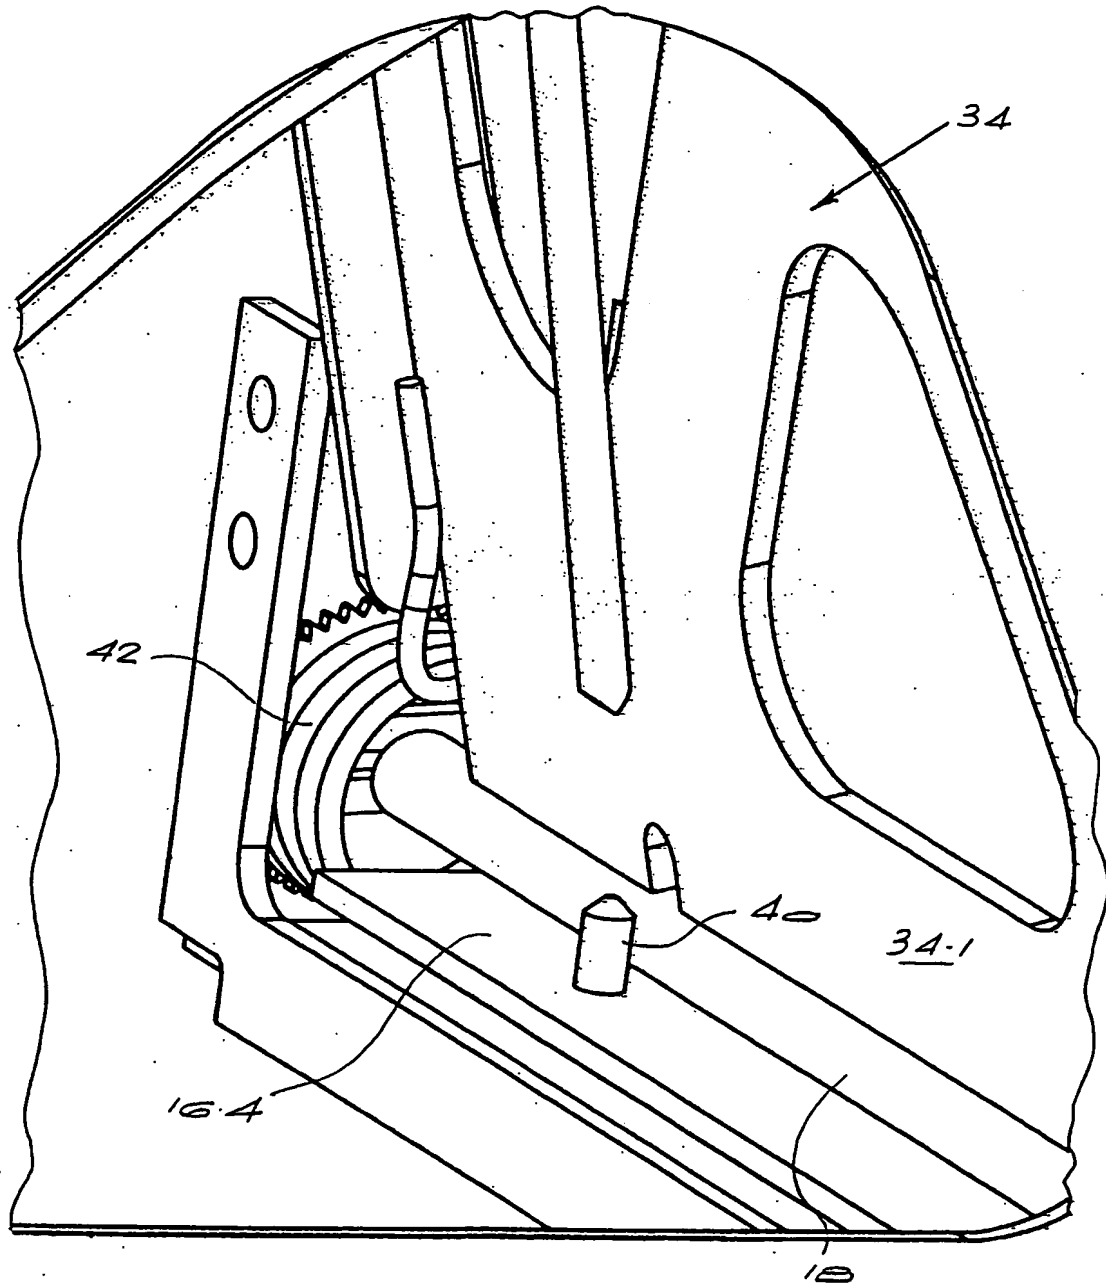

8/8

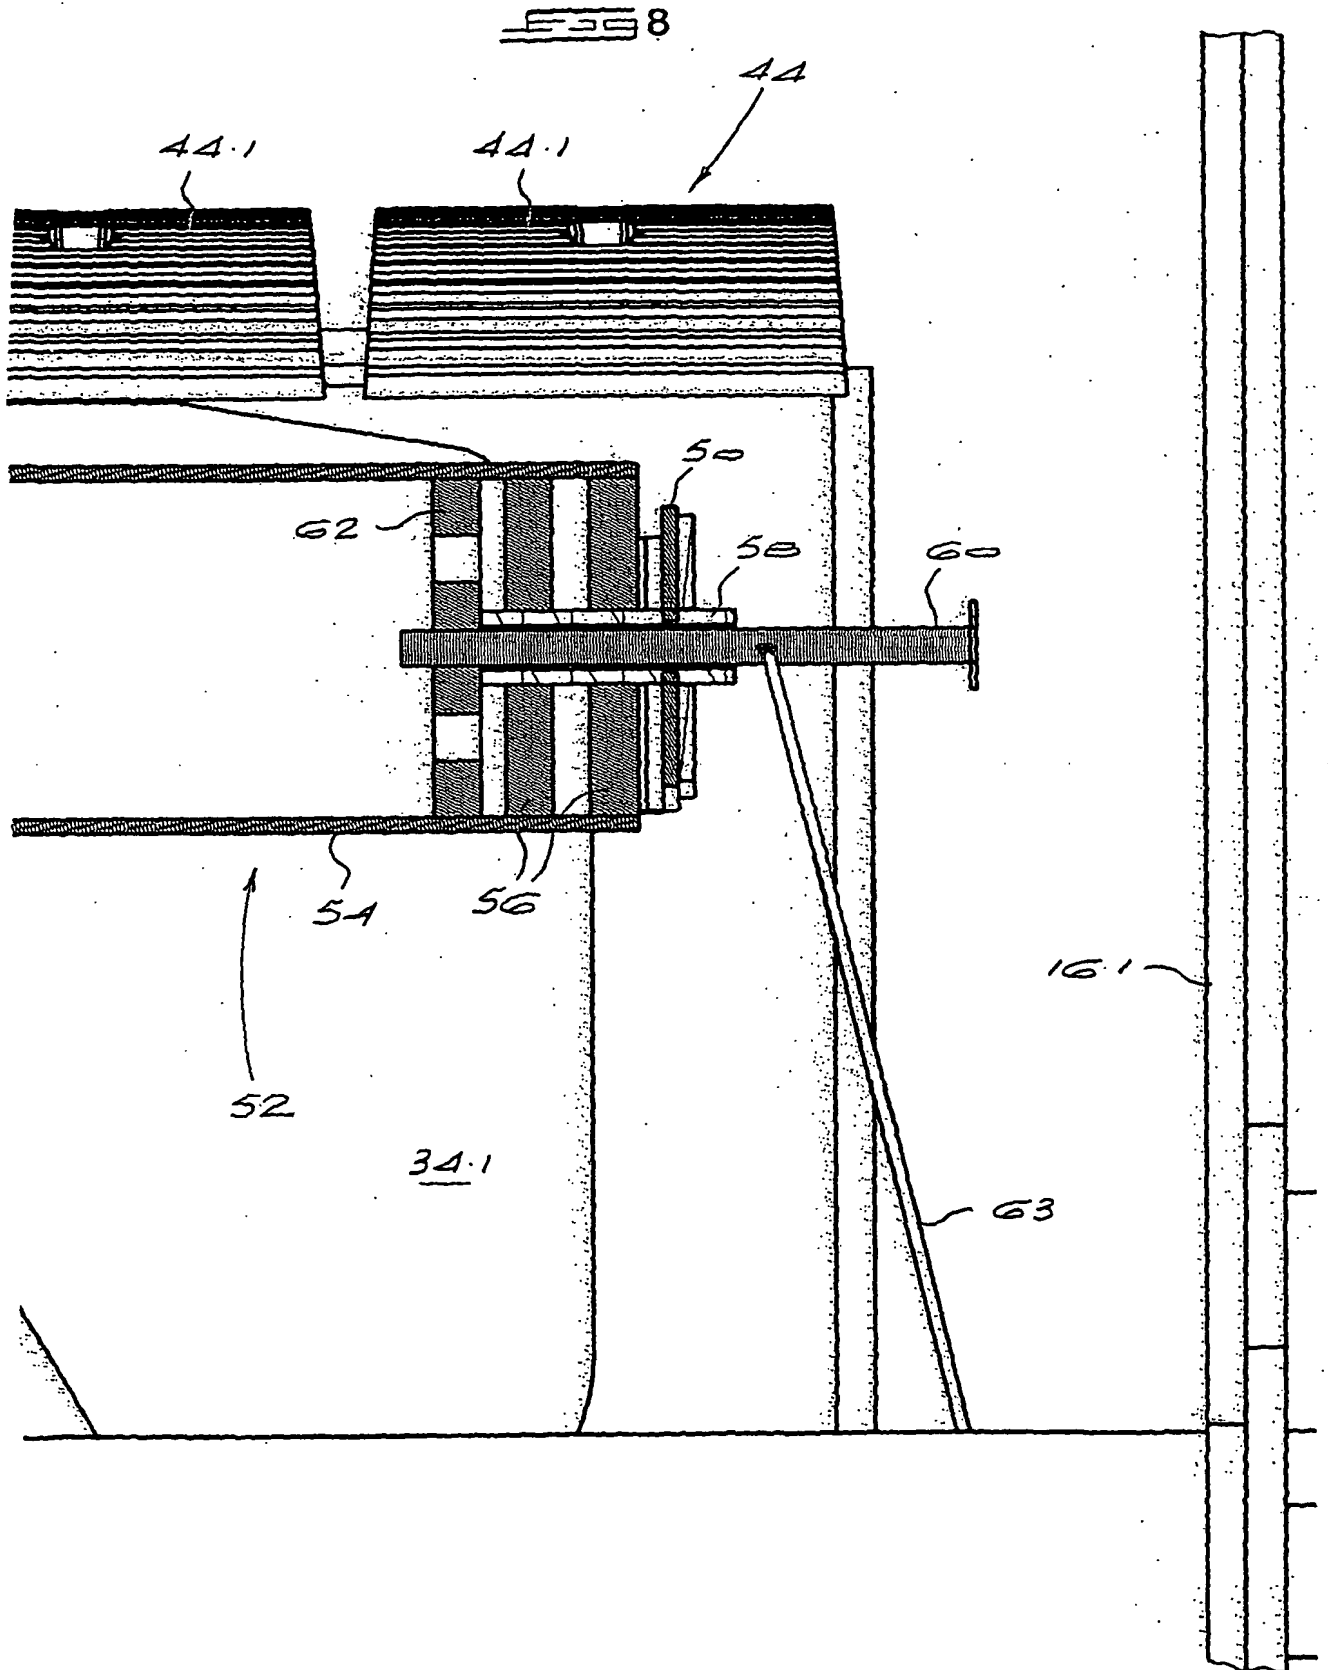

## INTERNATIONAL SEARCH REPORT

PCT/IB 02/03321

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 B65G43/06

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B65G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 01 55013 A (NIEUWOUDT JAN HARMES) 2 August 2001 (2001-08-02) cited in the application	1,5,11
Y	page 2, lines 13-19, 24-25; page 3, line 28 - page 4, line 28; page 5, lines 8-32; claims 1, 10; figures 1,3-5,10,11	6,7,10
A	---	2-4,8,9, 12,13
Y	SU 1 467 005 A (SYZRANSKIJ TURBOSTROITELNYJ; LE GORNY I M G V PLECHANOVA (SU)) 23 March 1989 (1989-03-23)	6,7,10
A	the whole document ---	1-5,8,9, 11-13
	--- -/--	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents :

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\* &amp; \* document member of the same patent family

Date of the actual completion of the international search

12 November 2002

Date of mailing of the international search report

25/11/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Clivio, E

## INTERNATIONAL SEARCH REPORT

PCT/92/03321

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	SU 1 590 423 A (SYZRANSKIJ TURBOSTROITELNYJ Z; LE I IM G V PLEKHANOVA (SU)) 7 September 1990 (1990-09-07) the whole document ---	1-13
A	DE 10 45 321 B (SIEMAG MASCH STAHLBAU) 27 November 1958 (1958-11-27) the whole document -----	1-13



## INTERNATIONAL SEARCH REPORT

PCT/JP02/03321

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0155013	A	02-08-2001	WO 0155013 A1 AU 2884600 A	02-08-2001 07-08-2001
SU 1467005	A	23-03-1989	SU 1467005 A1	23-03-1989
SU 1590423	A	07-09-1990	SU 1590423 A1	07-09-1990
DE 1045321	B	27-11-1958	NONE	